

ZERON

NEW LIGHT NEW LIFE

Explosion Proof Zeron


OHBF8192-600



■ Specification

Executive Standart	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.2 GB3836.9	20W 40W 60W	AC220-240V 50/60Hz	2.9kg	∅635X125X77MM	≥75Ra	>0.95	120 Deg	IP66
Anticorrosion Grade		Light Effect		Introduction Device			Explosion Proof Mark	
WF2		120Lm/W		2400Lm 4800Lm 7200Lm			Ex nR IIC T6 Gc/Ex tD A21 IP66 T80 °C	

Dimension [mm]

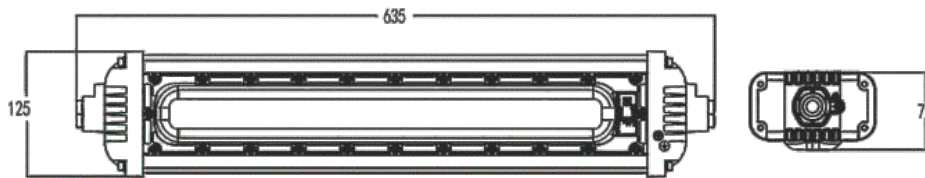

Installation Mode

