




# DOWN LIGHT

Indoor Light | Downlight



## Downlight Ecoluxon

### ELX-SLDR


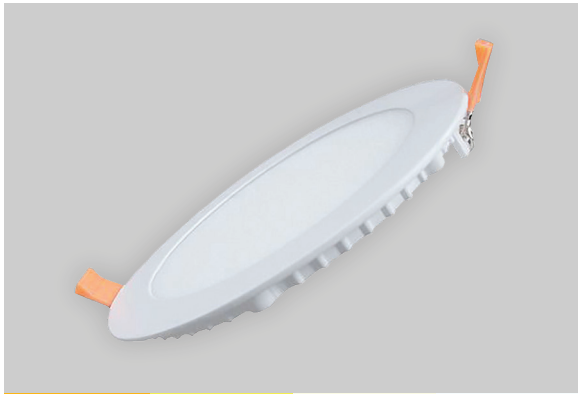


- 3.000K
- 4.000K
- 5.000K
- 6.000K



## ■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Berat	Material
6W	AC100-240V	50/60Hz	100Lm/W	600Lm	>80Ra	3000K/4000K/6000K	IP20	110gr	Aluminium Alloy
9W	AC100-240V	50/60Hz	100Lm/W	900Lm	>80Ra	3000K/4000K/6000K	IP20	150gr	Aluminium Alloy
12W	AC100-240V	50/60Hz	100Lm/W	1.200Lm	>80Ra	3000K/4000K/6000K	IP20	190gr	Aluminium Alloy
18W	AC100-240V	50/60Hz	100Lm/W	1.800Lm	>80Ra	3000K/4000K/6000K	IP20	270gr	Aluminium Alloy
24W	AC100-240V	50/60Hz	100Lm/W	2.400Lm	>80Ra	3000K/4000K/6000K	IP20	470gr	Aluminium Alloy



Model : ELX-SLDR-6W

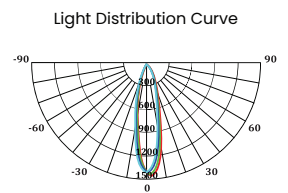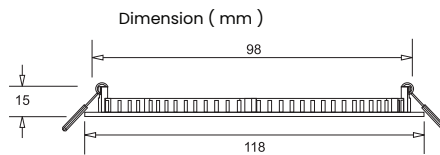



Model : ELX-SLDR-9W

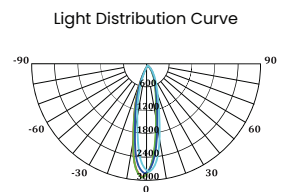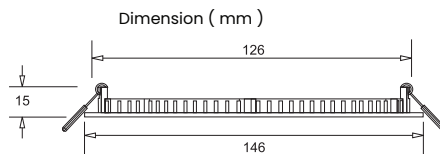



Model : ELX-SLDR-12W

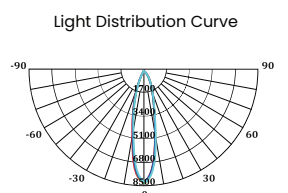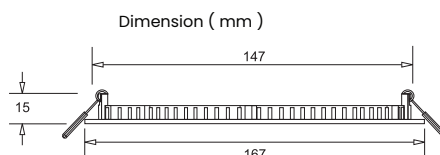

Model : ELX-SLDR-18W

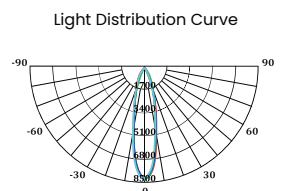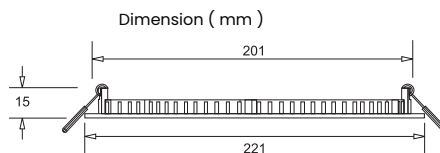

Model : ELX-SLDR-24W

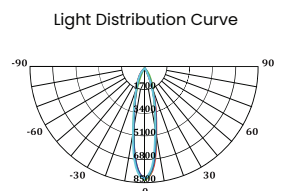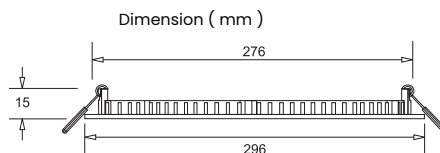

- \* Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

