



DOWN LIGHT


Indoor Light | Downlight

ZERON

NEW LIGHT NEW LIFE

Recessed Downlight












ZERN-H01GS

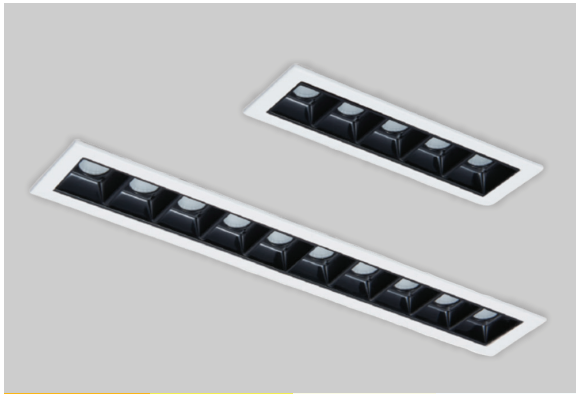

3.000K 4.000K 5.000K 6.000K

■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Material
4W	AC100-240V	50/60Hz	100Lm/W	400Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium
6W	AC100-240V	50/60Hz	100Lm/W	600Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium
10W	AC100-240V	50/60Hz	100Lm/W	1.000Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium
16W	AC100-240V	50/60Hz	100Lm/W	1.600Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium
20W	AC100-240V	50/60Hz	100Lm/W	2.000Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium
30W	AC100-240V	50/60Hz	100Lm/W	3.000Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K	IP20	15°/24°/45°	Die Casting Aluminium

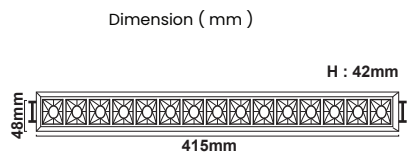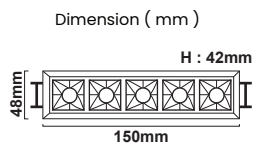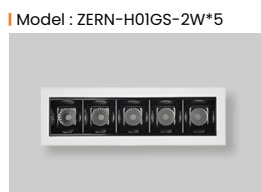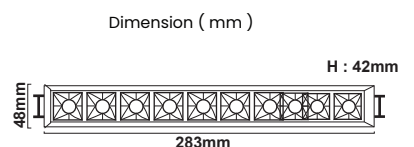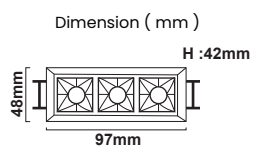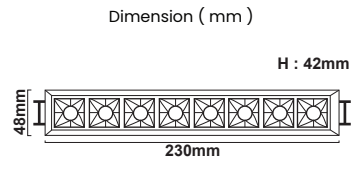

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

