



ZERON
NEW LIGHT NEW LIFE

Downlight Zeron

ZERN-COBDH-ZRSM



3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Berat	Material
20W	AC175-265V	50/60Hz	90Lm/W	1.800Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/6000K	IP20	476gr	Die Casting Aluminium
30W	AC175-265V	50/60Hz	90Lm/W	2.700Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/6000K	IP20	616gr	Die Casting Aluminium
40W	AC175-265V	50/60Hz	90Lm/W	3.600Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/6000K	IP20	939gr	Die Casting Aluminium


Model : ZERN-COBDH-ZRSM-20W



Dimension (mm)

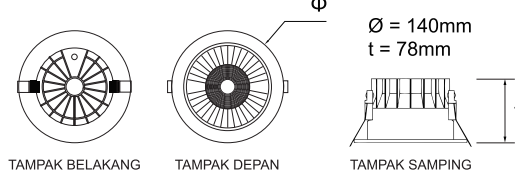


Light Distribution Curve

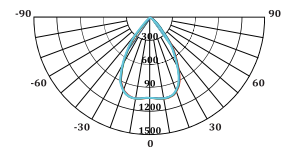


Model : ZERN-COBDH-ZRSM-30W



Dimension (mm)

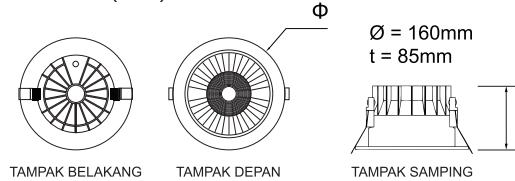


Light Distribution Curve

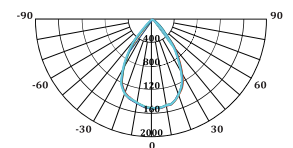


Model : ZERN-COBDH-ZRSM-40W



Dimension (mm)

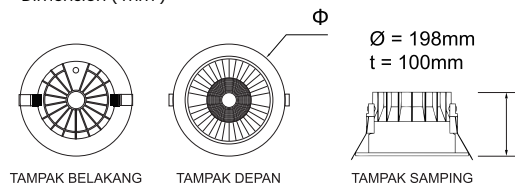

Light Distribution Curve

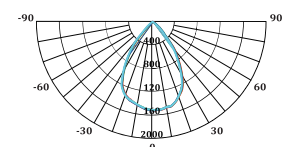

* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

