




FLAT LIGHT

Indoor Light | Flat Light

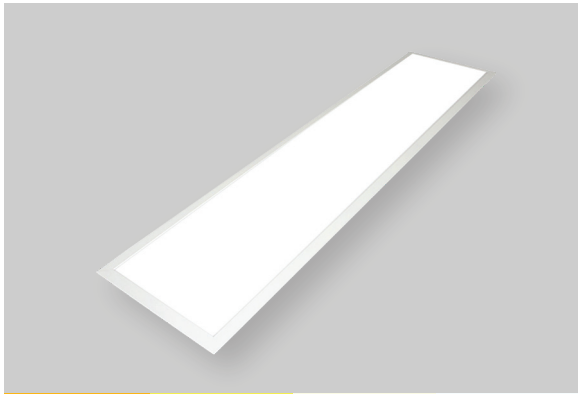

Flat Light Ecoluxon ELX-FLT-ECOFLPJ




3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Berat	Material
36W	AC170-265V	50/60Hz	120Lm/W	4.320Lm	>80Ra	4000K/6000K	IP20	2.4kg	Die Casting Aluminium
48W	AC170-265V	50/60Hz	120Lm/W	5.760Lm	>80Ra	4000K/6000K	IP20	2.5kg	Die Casting Aluminium


External Type

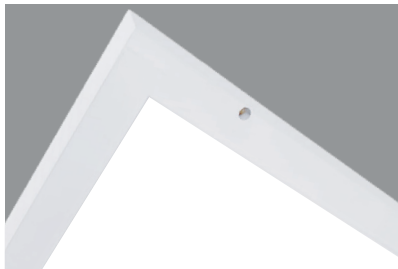

Dimension (mm)

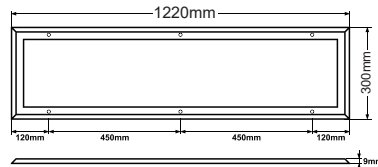


Light Distribution Curve

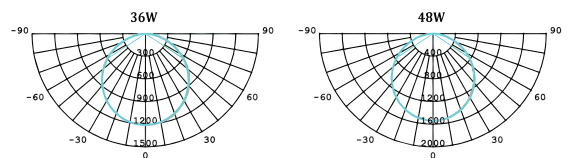


Internal Type



Dimension (mm)

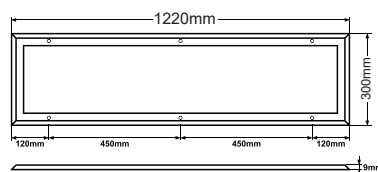


Light Distribution Curve

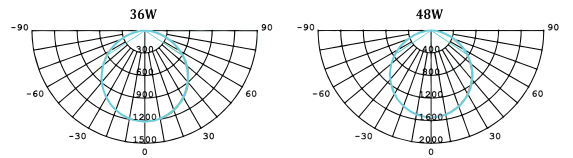


Thick Type



Dimension (mm)

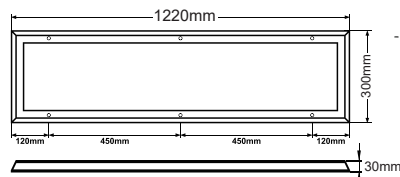

Light Distribution Curve

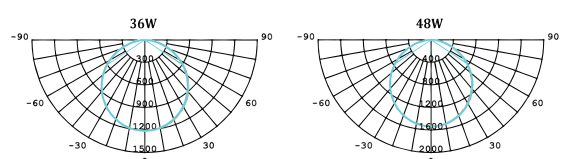

* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

