



MR16

Indoor Light | MR16



MR16 Ecoluxon

ELX-MRDC



3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Beam Angle	Berat	Material
6W	DC 12V	50/60Hz	100Lm/W	600lm	>90Ra	3000K/4000K/6000K	15°/24°	43.5gr, 40gr	Aluminium Alloy


Model : ELX-MRDC15HQ-6W



Dimension (mm)

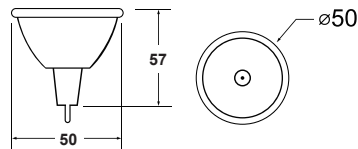


Light Distribution Curve




Model : ELX-MRDC24HQ-6W



Dimension (mm)

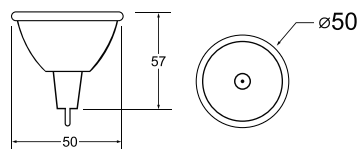

Light Distribution Curve



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

