

Raceway Ecoluxon

ELX-LILT




3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Dimensi	Berat	Material
18W	AC180-240V	50/60Hz	140Lm/W	2.520Lm	>80Ra	5000K	590x75x55mm	1kg	Die Casting Aluminium + PS
36W	AC180-240V	50/60Hz	140Lm/W	5.040Lm	>80Ra	5000K	1.180x75x55mm	2kg	Die Casting Aluminium + PS


Model : ELX-LILT60-18W

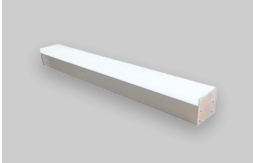


Dimension (mm)

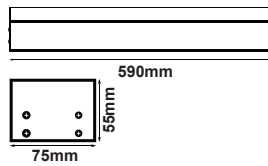


Light Distribution Curve




Model : ELX-LILT120-36W

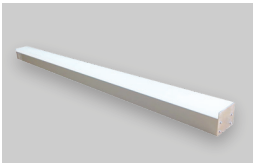



Dimension (mm)

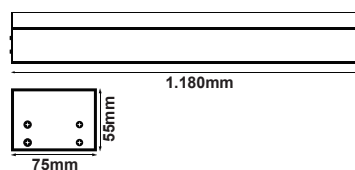

Light Distribution Curve



Accessories



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°