



Strip Light Ecoluxon

ELX-INST-COB





3.000K 4.000K 5.000K 6.000K



■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Berat	Material
8W	DC 12V	50/60Hz	100Lm/W	800Lm	>90Ra	3000K/4000K/6000K	IP20	5 Meter/Roll	Polymide
11W	DC 12V	50/60Hz	100Lm/W	1.100Lm	>90Ra	3000K/4000K/6000K	IP20	5 Meter/Roll	Polymide
14W	DC 12V	50/60Hz	100Lm/W	1.400Lm	>90Ra	3000K/4000K/6000K	IP20	5 Meter/Roll	Polymide

Model : COB

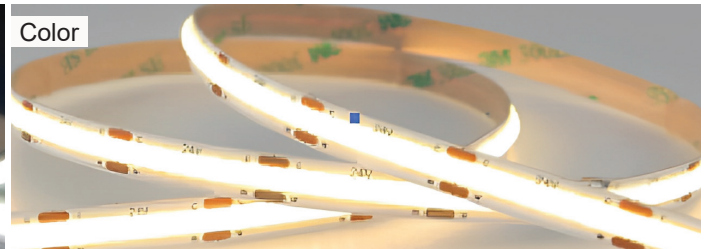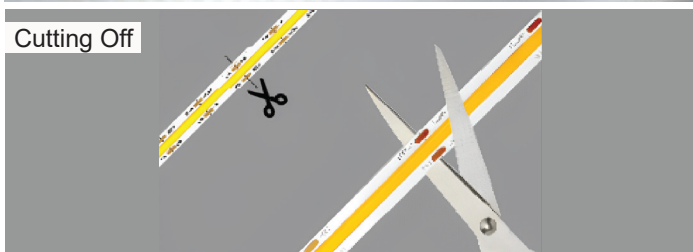

Application

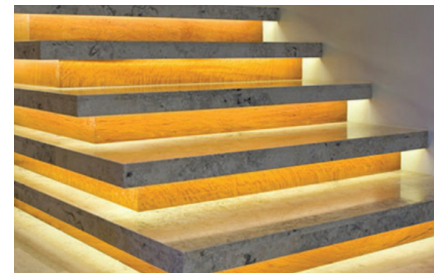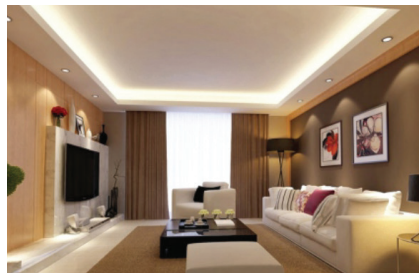

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

