



# STREET LIGHT

Outdoor Light | Street Light



## Street Light Ecoluxon

### ELX-SSD-ECSM



3.000K    4.000K    5.000K    6.000K


## ■ Specification

Daya (W)	Input Voltage	Frequency	Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Berat	Material
10W	AC100-240V	50/60Hz		120Lm/W	1.200Lm	>70Ra	3000K/6000K	IP66	120°	600gr	Die Casting Aluminium
20W	AC100-240V	50/60Hz		120Lm/W	2.400Lm	>70Ra	3000K/6000K	IP66	120°	600gr	Die Casting Aluminium
50W	AC100-240V	50/60Hz		120Lm/W	6.000Lm	>70Ra	3000K/6000K	IP66	120°	1kg	Die Casting Aluminium
70W	AC100-240V	50/60Hz		120Lm/W	8.400Lm	>70Ra	3000K/6000K	IP66	120°	1.7kg	Die Casting Aluminium
100W	AC100-240V	50/60Hz		120Lm/W	12.000Lm	>70Ra	3000K/6000K	IP66	120°	1.7kg	Die Casting Aluminium
150W	AC100-240V	50/60Hz		120Lm/W	18.000Lm	>70Ra	3000K/6000K	IP66	120°	2.5kg	Die Casting Aluminium


Model : ELX-SSD-ECSM-10W/20W



Dimension ( mm )




Light Distribution Curve

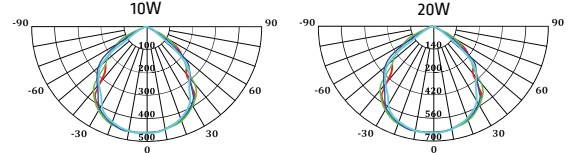


Model : ELX-SSD-ECSM-50W



Dimension ( mm )

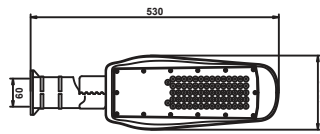


Light Distribution Curve




Model : ELX-SSD-ECSM-70W/100W



Dimension ( mm )




Light Distribution Curve

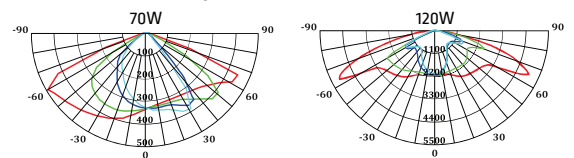


Model : ELX-SSD-ECSM-150W



Dimension ( mm )

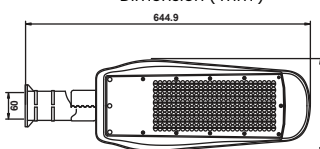

Light Distribution Curve



- \* Easy maintenance
  - Modular LED for easy replacement
  - Opening and closing possible of LED module part and power supply part
  - Customizable beam angle
  - Temperature max 50°

